Iris & Face Recognition

iT100

Time Clock for the Modern Workforce





Iris / Face Fusion



Counter measures



Advanced Security



Large Capture Volume



Open Android Platform

The iT100 is Iris ID's newest non-contact biometric offering that features both iris and facial recognition technology. Automatic recognition of iris and/or face is possible. A large capture volume allows for increased flexibility, speed and convenience. Enhanced security through Secure Boot and an open Android Platform provides an opportunity for third party application development.



Features



IRIS / FACE Fusion

Operates in Iris only / Face only / and, or, fusion mode. Select and use according to the biometric security environment.



Simultaneous Biometric Capture

Automatically captures dual iris and face at the same distance.



Countermeasures

on 7" multi Touch LCD.

A proven set of anti-spoof measures that continues to set the standard for the industry is included.



Non-Contact Authentication

Automatically captures faces and iris naturally up to 24 inches or 60 cm.



Eve Safety Certified

Tested and meets UL, ANSI, and international eye safety standards.



Automatic Tilt Adjustment

7 inch Multi Touch Display

The Camera automatically finds user and moves to a location where the user's eyes and face can be photographed.

Easy on device setting & user enrollment available with Self-guidance with live images



Advanced Security

Information is encrypted, Secure Boot platform and Advanced Network security.



Open Android Platform

Matching Speed Less than 1 sec

Open Android Platform provides for third party application development.

Large Capture Volume


Quickly and easily authenticates just by looking at the screen with wide recognition range of Iris 30~60cm(12~24") & Face 30~80cm(12~32").

Specifications

Dimensions (W x H x D)	18cm x 14cm x 3cm (7.1" x 5.4" x 1.2")
Weight	1.2lbs (543g)
Туре	Walk-up
Power Input / Consumpti	onl 2 - 24 VDC (auto - +/- 500 mv ripple voltage industry standard) / Max. 30wat
OS	Android OS 7.1
User Interface	Self-guidance with displayed images on LCD
Operation	Iris and or Face, Face + Iris Fusion
User Capacity	Up to 10,000 1:N, 100,000 1:1 users
Transactions	Number of transaction logs on device DB: 1M (Iris) / 100,000 (Face)
Encryption	AES256
USB	1 Port

Tilt	Auto Range: -25° ~ +25°
Languages	Support multiple languages and characters simultaneously
attAlgorithm	IrisCapture / DualEyeInfo™ / Countermeasure / Face Matching
Real Time Clock	Internal battery
Proximity detection	ToF Sensor
Certifications	CE, FCC, KC, Eye Safety, UL294
Operating Range	Iris Camera: 30 ~ 60cm (12~24") / Face Camera: 30~80cm max (12~32")
Temperature	Operating: 0 ~ 45 °C (32 ~ 113 °F) / Storage: -20 ~ 90 °C (-4 ~ 194 °F)
Connectivity	Ethernet or Wi-Fi (optional) Relay
Upgradable Hardware	Weigand, GPI, Serial Interface, External Card Reader

Installation

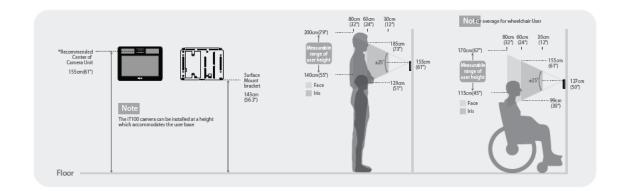

IrisTime™ Solution

Iris ID's IrisTime™ solutions continue to set the standard for integration, performance and versatility for iris recognition. Whether you are looking for a single biometric solution, or a fusion of iris and face recognition, the IrisTime™ product is the answer. Integration with cards, or keypad input is also possible. IrisTime ™ offers a built in App, the iTMS Solution and also provides a development environment for the application developer. A REST API provides access to all of the features and functions of the IrisTime™ platform.

iTMS™

The iTMS $^{\text{IM}}$ (iT100 Management System) is a device management application that runs on Windows/Mac OS/Linux workstation that can manage multiple iT100's using the REST API. iTMS™ allows the administrator/operator to configure the iT100 so that it can instantly be up and running.

Use Cases



Time & Attendance



Laboratory



Buildinas



Healthcare



Manufacturing



Construction



Iris ID Systems, Inc.

8 Clarke Drive, Cranbury, NJ 08512, USA Tel. +1-609-819-4747 Fax. +1-609-819-4730 www.irisid.com | sales@irisid.com

